



BOURGEAT

LA MOBILITÉ DU GOÛT

SATELLITE 4G

HOLDING CUPBOARDS - HOT - GN2/1 & GN1/1 MODELS

THE INTELLIGENT SOLUTION TO PRESERVE TASTE



SATELLITE 4G

VERY EASY TO USE TOUCH CONTROL SCREEN

VERSATILE AND SAFE THANKS TO PRE-SELECTED PROGRAMMES

QUICK AND EASY TO CLEAN INTERIOR WITH DIE-STAMPED SLIDES

EASY TO MOVE THANKS TO CASTORS AND SIDE HANDLES



Do you want to keep your dishes warm without diminishing the quality and flavour of your dishes? Satellite 4G is the food warming solution for professional restaurants.

These cabinets are designed to facilitate your hot meal transfers. They are compatible with stainless steel gastronomy containers.

Thanks to its exceptional performance, the Satellite 4G cabinet preserves flavour for better food service.

STANDARD EQUIPMENT

- Touch control panel on the front the door.
- Programs for quick setting plus a customisable «chef» mode to preserve flavour.
- Electronic control with delayed start clock.
- Side handles.
- Condensate collection tank.
- Models with humidification : removable water reservoir 4L⁽¹⁾ (Consumption of cabinets at 100% humidification setting: between 0.3 and 0.5 L/H, i.e. between 9 and 15 hours of operation).
- Usage and after-sales service alarms.
- With key-lock.

CONSTRUCTION

- Made in stainless-steel.
- Internal walls with pressed one-piece rails.
- Insulation (CFC-free foam insulation- 60 to 80 mm) - walls and door.
- Insulated doors in full stainless steel or with glazed panel (double glazing) with key-lock. 180° opening with position retaining points.
- Protective strip on the lower part.
- Internal walls with pressed one-piece rails. Space between shelves 71 mm.
- The shelves are fitted with stops to hold the GN pans or grids securely in place.
- Air circuit removable without tools.
- Spiral connection lead with moulded plug and cable holder on the back of the cupboard.
- 4 swivel wheels, including 2 with brakes, with stainless steel outer.

• Models with humidification :

4 pre-selected programmes for temperature/humidification optimisation depending on the type of recipe; one Chef mode for specific settings: temperature adjustable from 40°C to 85°C, humidification adjustable from 0% to 100%⁽¹⁾.

• Models without humidification:

2 pre-selected programmes, one Chef mode for specific settings : temperature adjustable from 40°C to 85°C.

- Deferred programmable start to reduce electricity use.
- Visual warnings on the control panel in the event of problems of use.
- Information tracking: temperature curves, power outages, alarms.
- Homogeneous ventilated heating system (1°C maximum gradient).
- Rapid pre-heating (increase from 20°C to 85°C in 7 mn).
- NF Food Hygiene Certification.
- Protection index : 25.
- These cupboards are conform with EN 631-2 and the heated models only also conform to NF EN 60335-1, EN 60335-2-49 and NF D 40-016.

OPTIONS (depending on the models)

- Door opening option.
- UK electrical plug.
- Set of 4 «all terrain» wheels.
- 4 stainless steel feet with jacks.
- Underframe.
- **Towing kit :**
Two factory-fitted stainless steel drawbars integrated into the cabinet with handle for folding/unfolding. 4 castors diam.160 mm (2 fixed, 2 swivel).
This towing kit is compatible with the electric Tractodiff tractor [Tractodiff réf. Jobby M4](#).


Multiple Satellite 4G (also fitted with the kit) can be towed at the same time thanks to the hook on the back of the cabinet.

Limit the number of cabinets to ensure safe movement.

For use with other tractor models, consult us.

ACCESSORIES (depending on the models)

- Gloves/food probe holder.
- Information sheets holder.
- Anti-static braid.
- Basket for plates : only for use with GN2/1 models, entry 530 mm - Uses 3 levels of slide and 2 baskets maximum depth . For plates diam. mini/maxi : 220/260 mm.
- Retractable handle.
- Moulded top.
- Set of 4 «all terrain» wheels - Swivel castors with stainless steel cover - 2 with brakes - fitted on the customer's premises.

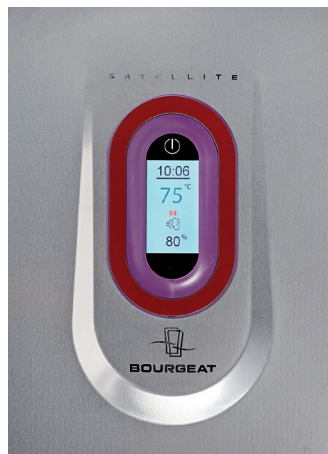

⁽¹⁾ Requires water meeting the total hardness specifications of max. 6°F and a chloride content of max. 30 mg/l.

Test kits are available in the Bourgeat catalogue

Cabinet towing kit used with a Tractodiff Jobby M4 tractor.



GN2/1 CUPBOARDS - PROFILE 530 MM

		GN20	GN30	GN40
Number of levels		10	15	20
Loading option with S/S containers GN1/1 H65		20	30	40
Space between shelves		71 mm	71 mm	71 mm
Overall length		791 mm	791 mm	791 mm
Overall depth		959 mm	959 mm	959 mm
Overall height		1166 mm	1521 mm	1876 mm
Capacity		0,29 m³	0,42 m³	0,56 m³
Net weight		100 kg	120 kg	140 kg
Maximum load		200 kg	250 kg	300 kg
Power		1750 watts	2350 watts	2950 watts
Amperage		7,5 A	10,5 A	13 A
Voltage - single phase 50/60 Hz		230 V	230 V	230 V
Electrical power		0,8 kwh	1,2 kwh	1,52 kwh
Dimensions of the wheels - 2 with brakes - Stainless steel		160 mm	160 mm	160 mm
Heated with stainless-steel door	Without humidification	840220	840230	840240
	With humidification	840320	840330	840340
Heated with glazed door	Without humidification	841220	841230	841240
	With humidification	841320	841330	841340

OPTIONS (assembly in factory only)


Door opening option	844000	844000	844000
1 - Towing kit	844070	844070	
UK electrical plug	844080	844080	844080
Set of 4 «all terrain» wheels diam. 160 mm	844010	844010	844010

ACCESSORIES


2 - Gloves/food probe holder	844008	844008	844008
3 - Information sheets holder	844005	844005	844005
Anti-static braid	844004	844004	844004
4 - S/s basket for plates - L 530 x l 385 x H 194mm	750514	750514	750514
Set of 4 «all terrain» wheels diam160mm fitted on the customer's premises	844024	844024	844024



1

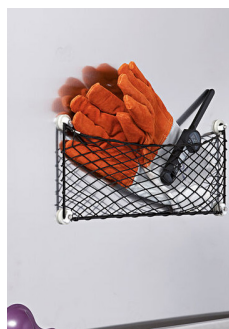

2

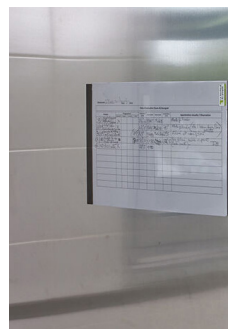


3




4

DIMENSIONS SATELLITE GN2/1 - PROFILE 530 MM


GN20

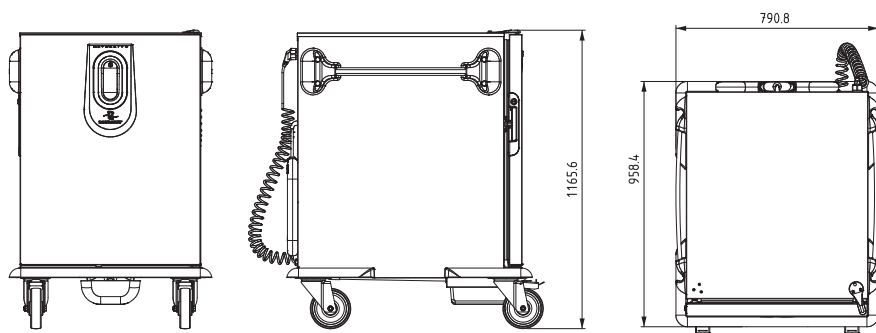

GN30

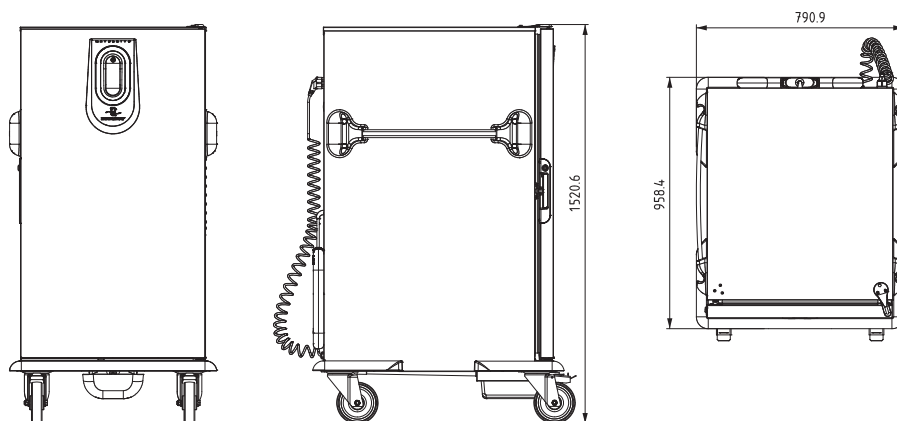

GN40

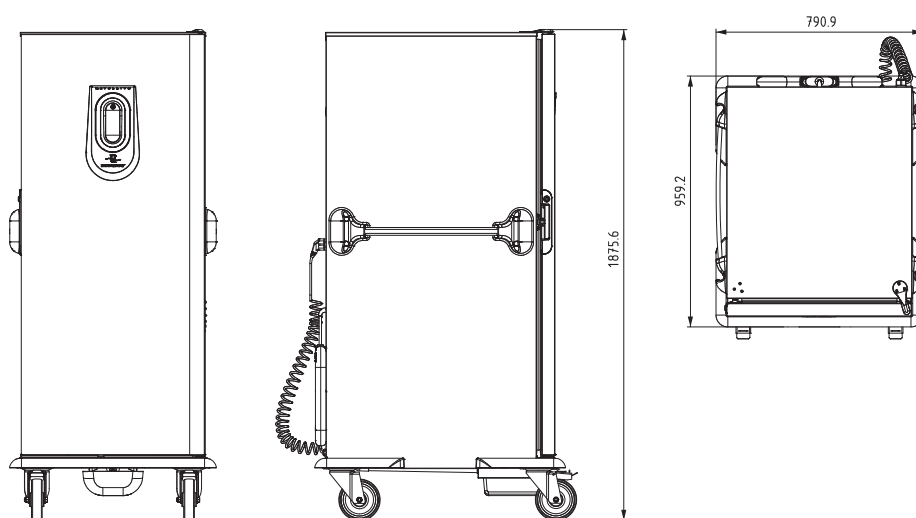



GN1/1 CUPBOARDS - PROFILE 325 MM


		GN6	GN10	GN17
Number of levels		6	10	17
Loading option with S/S containers GN1/1 H65		6	10	17
Space between shelves		71 mm	71 mm	71 mm
Overall length		547 mm	585 mm	585 mm
Overall depth		821 mm	844 mm	844 mm
Overall height		690 mm	1079 mm	1575 mm
Capacity		0,09 m ³	0,14 m ³	0,24 m ³
Net weight		50 kg	55 kg	90 kg
Maximum load		60 kg	100 kg	170 kg
Power		950 watts	950 watts	1750 watts
Amperage		4 A	4 A	7,5 A
Voltage - single phase 50/60 Hz		230 V	230 V	230 V
Electrical power		0,24 kwh	0,4 kwh	0,77 kwh
Dimensions of the wheels - 2 with brakes - Stainless steel		80 mm	125 mm	125 mm
Heated with stainless-steel door	Without humidification	843206	843210	840217
	With humidification	843306	843310	840317
Heated with glazed door	Without humidification		842210	841217
	With humidification		842310	841317

OPTIONS (assembly in factory only)

Door opening option	844000	844000	844000
UK electrical plug	844080	844080	844080
Set of 4 «all terrain» wheels diam. 160 mm		844012	844012
1 - Towing kit		844072	844072
4 stainless steel feet with jacks	844017		
Underframe	844015		
Kit to fit water tank on the side	844018		


ACCESSORIES

2 - Gloves/food probe holder	844008	844008	844008
3 - Information sheets holder	844005	844005	844005
Anti-static braid	844004	844004	844004
Retractable handle	844106		
Set of 4 «all terrain» wheels diam125 mm fitted on the customer's premises		844026	844026




DIMENSIONS SATELLITE GN1/1 - PROFILE 325 MM


GN6

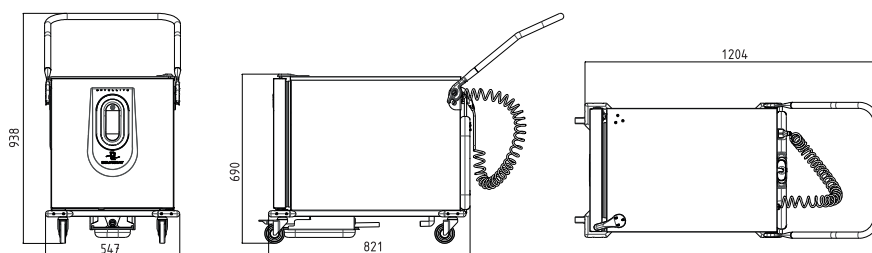

GN10

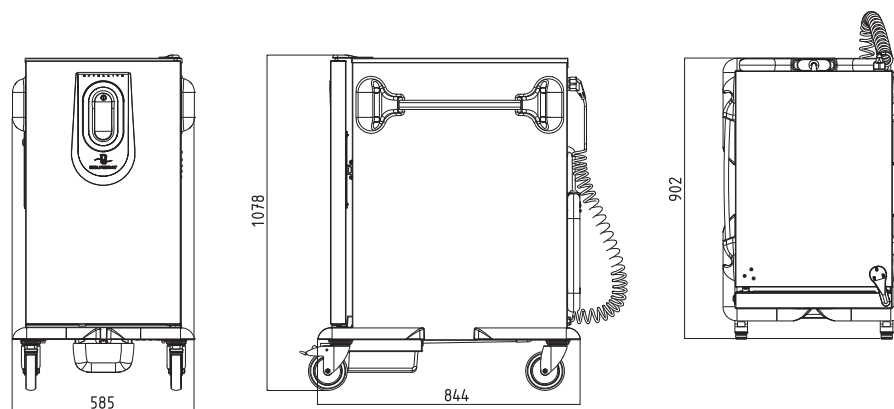

GN17

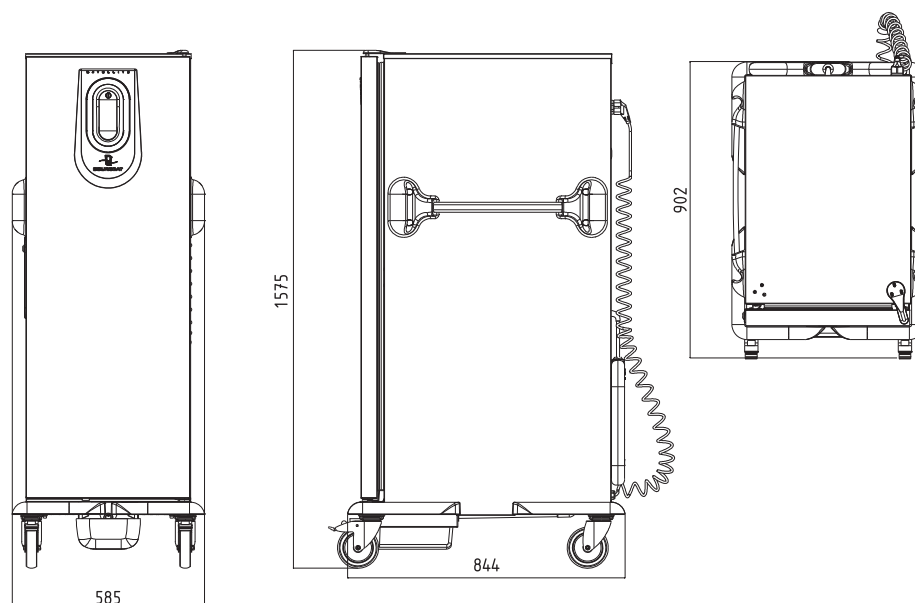



GN1/1 CUPBOARDS - PROFILE 530 MM

		GN6	GN10	GN15	GN20
Number of levels		6	10	17	20
Loading option with S/S containers GN1/1 H65		6	10	17	20
Space between shelves		71 mm	71 mm	71 mm	71 mm
Overall length		752 mm	791 mm	791 mm	791 mm
Overall depth		765 mm	804 mm	804 mm	804 mm
Overall height		727 mm	1123 mm	1478 mm	1833 mm
Capacity		0,09 m³	0,15 m³	0,22 m³	0,29 m³
Net weight		50 kg	80 kg	120 kg	140 kg
Maximum load		60 kg	100 kg	150 kg	200 kg
Power		950 watts	950 watts	1750 watts	1750 watts
Amperage		4 A	4 A	7,5 A	7,5 A
Voltage - single phase 50/60 Hz		230 V	230 V	230 V	230 V
Electrical power		0,27 kwh	0,45 kwh	0,68 kwh	0,88 kwh
Dimensions of the wheels - 2 with brakes - Stainless steel		80 mm	125 mm	125 mm	125 mm
Heated with stainless-steel door	Without humidification	840206	840210	840215	840221
	With humidification	840306	840310	840315	840321
Heated with glazed door	Without humidification		841210	841215	841221
	With humidification		841310	841315	841321

OPTIONS (assembly in factory only)

Door opening option	844000	844000	844000	844000
UK electrical plug	844080	844080	844080	844080
Set of 4 «all terrain» wheels diam. 160 mm		844011	844011	844011
1 - Towing kit		844071	844071	844071
4 stainless steel feet with jacks	844017			
Underframe	844015			
Kit to fit water tank on the side	844018			


ACCESSORIES

2 - Gloves/food probe holder	844008	844008	844008	
3 - Information sheets holder	844005	844005	844005	
Anti-static braid	844004	844004	844004	
Retractable handle	844006			
Moulded top	844007	844009		
Set of 4 «all terrain» wheels diam 160 mm fitted on the customer's premises		844025	844025	844025


1



2




3




DIMENSIONS SATELLITE GN1/1 - PROFILE 530 MM


GN6

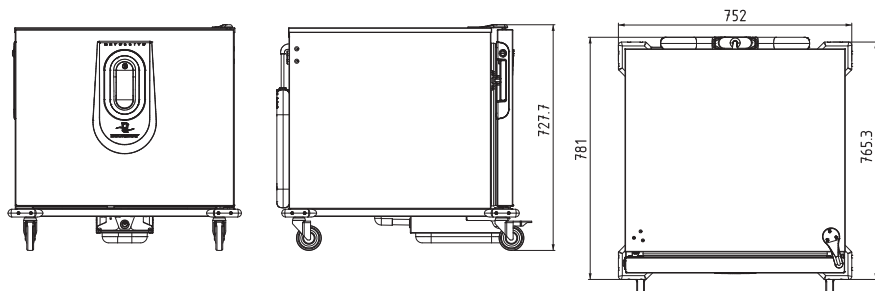

GN10

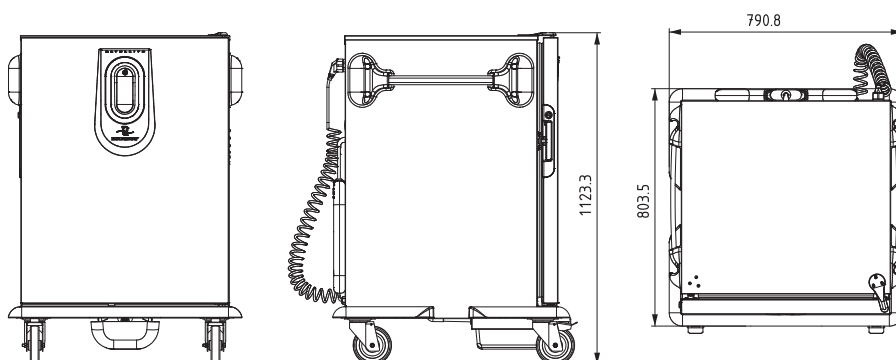

GN15

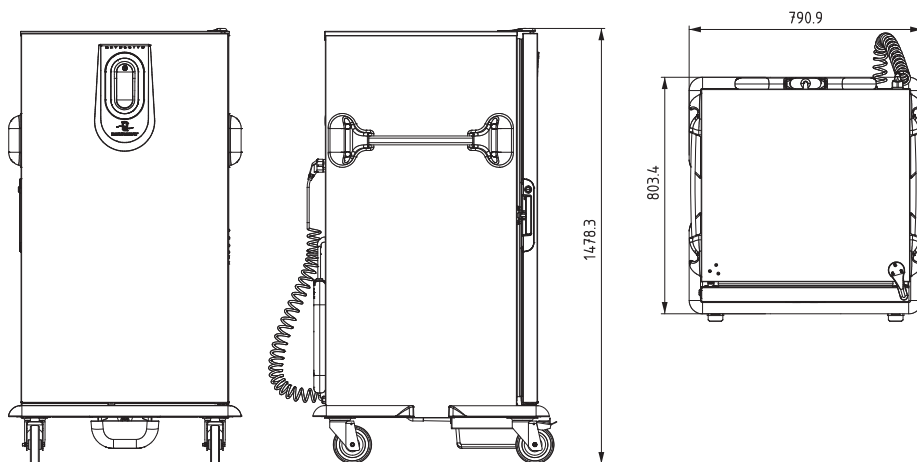

GN20

